


Viking Enviroclad TPO waterproofing membrane 1.52 mm thick, install as per manufacturers instructions

Viking 80mmØ clamped drain SDM049 with 304 S/S domed grate, installed as per manufacturers instructions.

Viking 80mmØ clamped overflow drain SDM049 with 304 S/S domed grate, installed as per manufacturers instructions.

Substrate

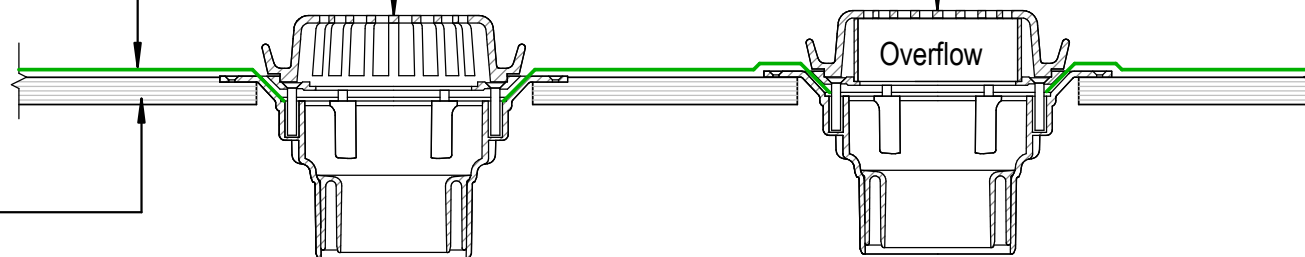

Flange width 230mm  
(280mm for 150mm outlet)

NOTE:  
Substrate to comply with current Viking Roofspec Masterspec specification  
Substrate Checksheet available from [www.vikingroofspec.co.nz](http://www.vikingroofspec.co.nz)

NOTE:  
1/ Overflow to match outlet capacity.  
2/ Overflow to be plumbed independent of stormwater, through soffit or exterior wall

DRAWING TITLE

Viking Enviroclad  
Penetration\_Outlet and Overflow

NOTES:

\* Angle fillets are not required at upstands for Enviroclad  
\* All fixings, cladding and structure are indicative only unless notated

**CodeMark**

Cert # GM-CMNZ30058

Cert # BV-CMNZ70176

Enviroclad systems are CodeMarked

DRAWING

INFORMATION ONLY

Scale:  
Not to Scale

Date:  
23/11/2020

Drawn:

Viking

Detail Ref:

**VIK\_ENV\_001\_PENEOUTL**

**Viking** Roofspec  
Taking care of detail