
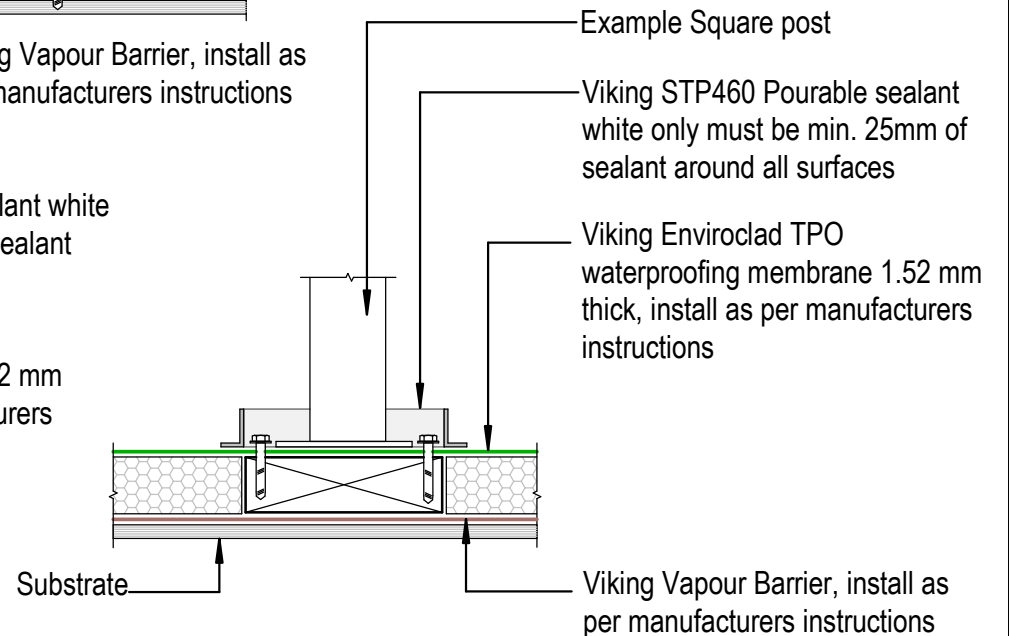
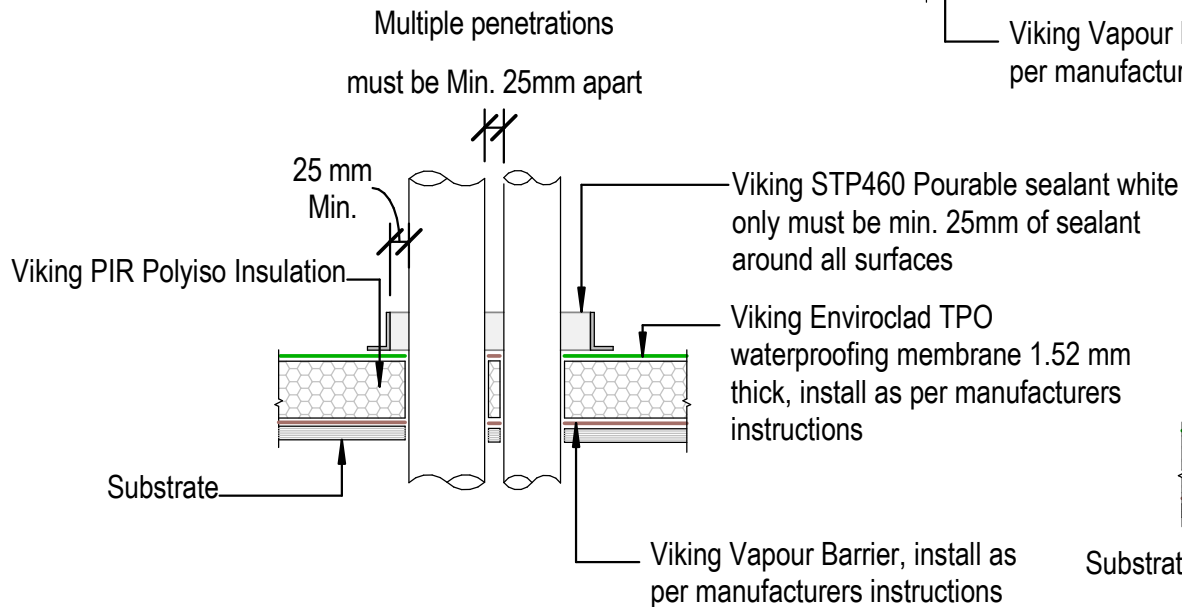


**NOTE:**

A Solution for very difficult shaped penetrations.  
**Note That all surfaces in contact with Pourable sealant must be primed with Viking SEC034 Lap primer**  
 This includes all pipes, bolts, brackets and TPO sealant surround.  
 For specific requirements contact Roofspec for advice

**NOTE:**

STP460 Pourable Pocket Sealant can be installed to materials reaching maximum 90°C

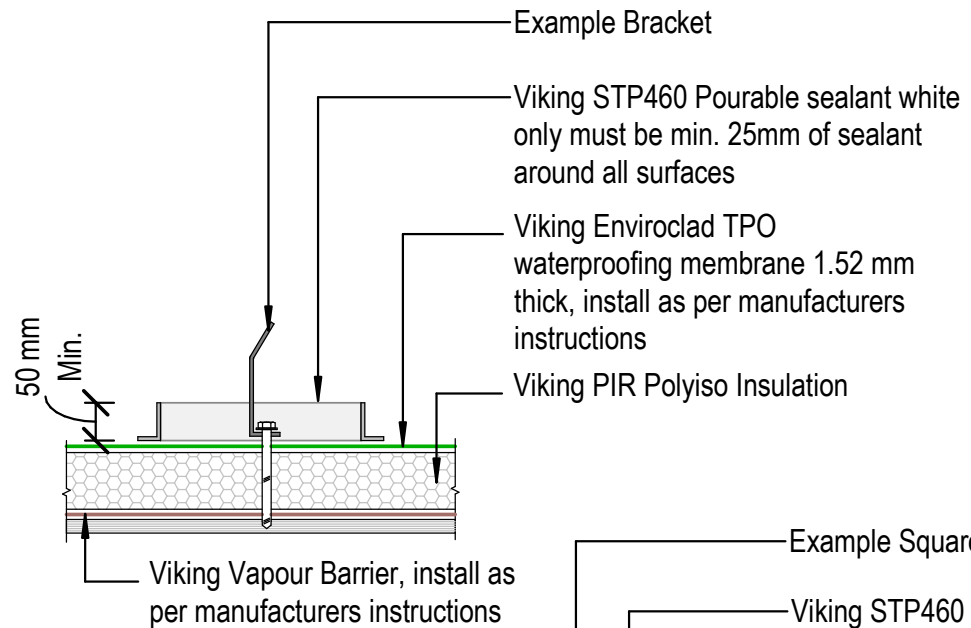

DRAWING TITLE

Viking WarmRoof - Enviroclad  
 Penetration\_TPO Pourable pocket and sealant

NOTES:

- \* Angle fillets are not required at upstands for Enviroclad
- \* All fixings, cladding and structure are indicative only unless noted
- \* All details to be read in conjunction with Viking Specifications

WarmRoof System is Branz Appraised - 713

DRAWING

INFORMATION ONLY

Scale:	Date:	Drawn:	Viking
Not to Scale	01/03/2022		

Detail Ref: **VIK\_WRE\_010\_PENETPO**

