


Viking Torch-on CAP sheet 4mm thick, install as per manufacturers instructions

Viking Torch-on BASE sheet 3mm thick, install as per manufacturers instructions

Substrate

Viking 80mmØ clamped drain SDM049 with 304 S/S domed grate, installed as per manufacturers instructions.

Viking 80mmØ clamped overflow drain SDM049 with 304 S/S domed grate, installed as per manufacturers instructions.

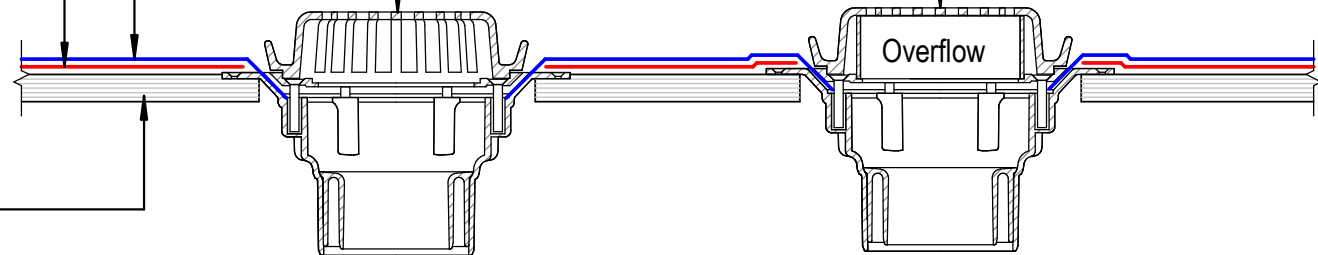

Flange width 230mm
(280mm for 150mm outlet)

NOTE:
Substrate to comply with current Viking Roofspec Masterspec specification
Substrate Checksheet available from www.vikingroofspec.co.nz

NOTE:
1/ Overflow to match outlet capacity.
2/ Overflow to be plumbed independent of stormwater, through soffit or exterior wall
3/ Viking Solvent-based Bituminous Primer to all metal and proprietary fitting

DRAWING TITLE

Viking Torch-On
Penetration_Outlet and Overflow

NOTES:

- Viking Waterproof Membrane as notated can be Viking Gemini, Lybra or Phoenix Super.
- All fixings, cladding and structure are indicative only unless notated.

CodeMark

Cert # GM-CMNZ30092

Cert # BV-CMNZ70171

Viking Torch-On systems are CodeMarked

DRAWING

INFORMATION ONLY

| | | | |
|--------------|------------|--------|-----------------------------|
| Scale: | Date: | Drawn: | Viking |
| Not to Scale | 23/11/2020 | | |
| Detail Ref: | | | VIK_TOR_001_PENEOUTL |

Viking Roofspec
Taking care of detail