


Viking Torch-on CAP sheet 4mm thick, install as per manufacturers instructions

Viking Torch-on BASE sheet 3mm thick, install as per manufacturers instructions

Substrate

Viking 80mmØ side exit clamped drain SDM055 with 304 S/S domed grate, installed as per manufacturers instructions.

Viking 80mmØ side exit clamped overflow drain SDM055 with 304 S/S domed grate, installed as per manufacturers instructions.

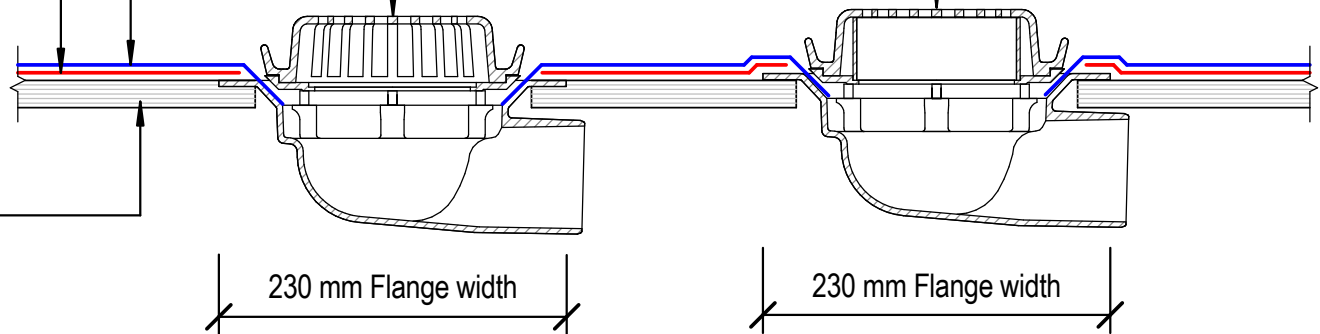

NOTE:  
 Substrate to comply with current Viking Roofspec Masterspec specification  
 Substrate Checksheet available from [www.vikingroofspec.co.nz](http://www.vikingroofspec.co.nz)

NOTE:  
 1/ Overflow to match outlet capacity.  
 2/ Overflow to be plumbed independent of stormwater, through soffit or exterior wall  
 3/ Viking Solvent-based Bituminous Primer to all metal and proprietary fitting



DRAWING TITLE <b>Viking Torch-On          Penetration_Outlet and Overflow Side Exit</b>
--

NOTES: <ul style="list-style-type: none"> <li>Viking Waterproof Membrane as notated can be Viking Gemini, Lybra or Phoenix Super.</li> <li>All fixings, cladding and structure are indicative only unless notated.</li> </ul>
--

<b>CodeMark</b> Cert # GM-CMNZ30092 Cert # BV-CMNZ70171 Viking Torch-On systems are CodeMarked
---

DRAWING INFORMATION ONLY			
Scale:	Date:	Drawn:	Viking
Not to Scale	23/11/2020		
Detail Ref: <b>VIK_TOR_001A_PENEOUTL</b>			