


Finish Membrane 100mm
min. up framing at ends.
Width to suit joinery and
cladding. Refer E2/AS1
FIG62(b)(d)

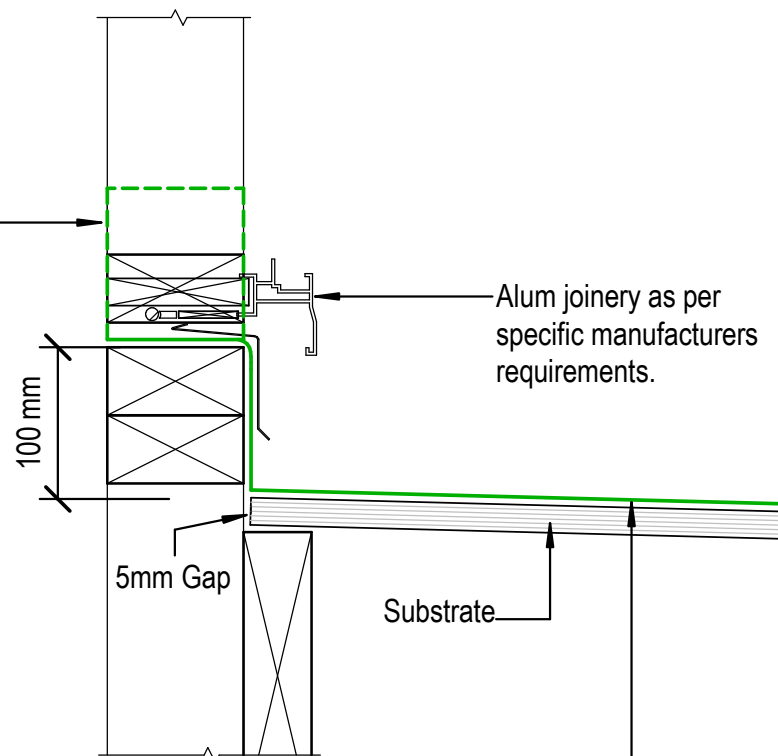

Alum joinery as per
specific manufacturers
requirements.

Substrate

NOTE:

Substrate to comply with current
Viking Roofspect Masterspec
specification
Substrate Checksheet available
from www.vikingroofspect.co.nz

Viking Enviroclad TPO
waterproofing membrane 1.52 mm
thick, install as per manufacturers
instructions

DRAWING TITLE

Viking Enviroclad
Threshold_Window

NOTES:

- * Angle fillets are not required at
upstands for Enviroclad
- * All fixings, cladding and structure are
indicative only unless notated

CodeMark

Cert # GM-CMNZ30058

Cert # BV-CMNZ70176

Enviroclad systems are CodeMarked

DRAWING

INFORMATION ONLY

Scale:	Date:	Drawn:	Viking
Not to Scale	23/11/2020		
Detail Ref:	VIK_ENV_091_WINDTHRS		