


Viking Enviroclad TPO waterproofing membrane 1.52 mm thick, install as per manufacturers instructions

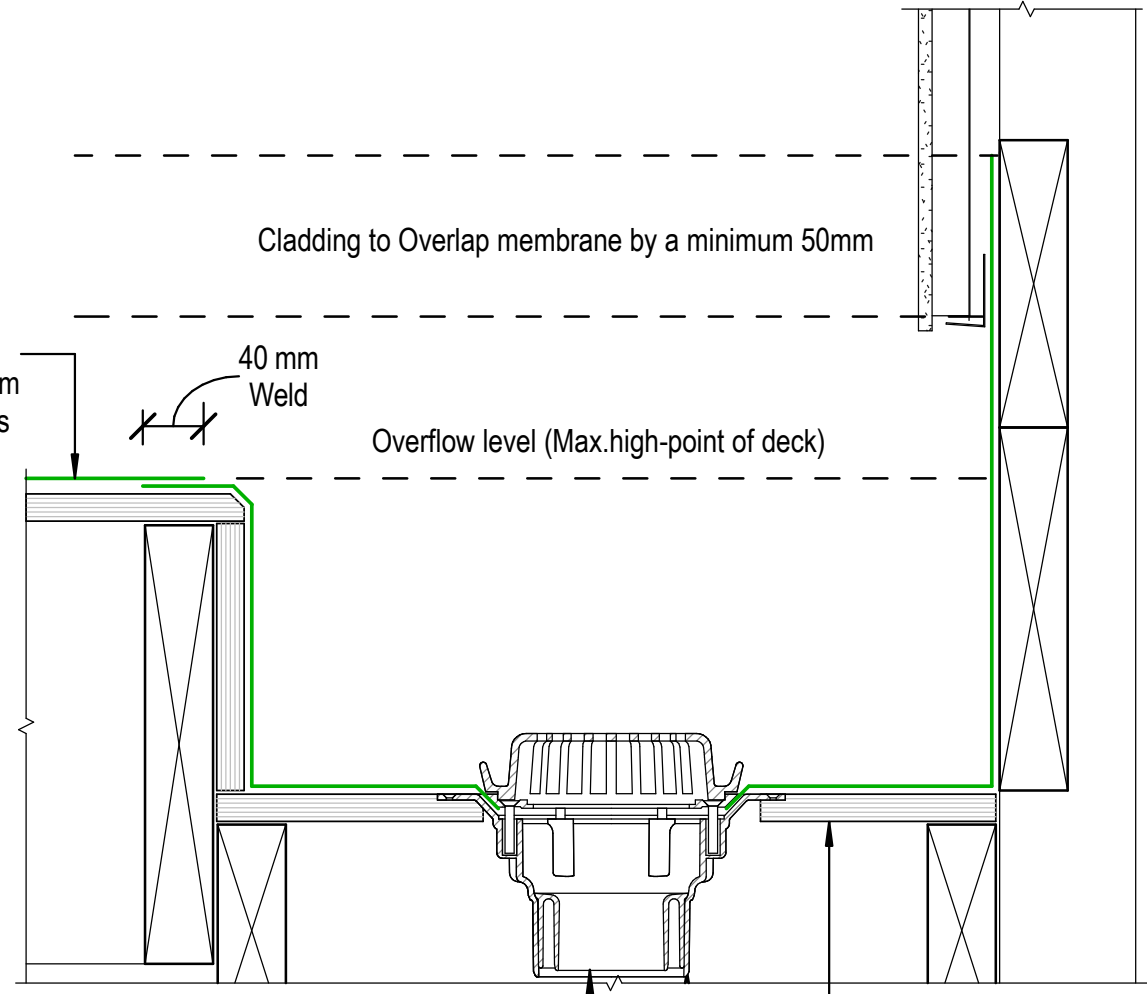

A Membrane continues a further 100mm beyond Internal floor level as per E2/AS1 Fig 62(b,d)

B 100mm threshold from high-point of deck to Internal floor level or 150mm for roof to wall upstand. Refer E2/A1 Fig 64(b)

Viking 80mmØ clamped drain SDM049 with 304 S/S domed grate, installed as per manufacturers instructions.

Substrate

NOTE:
 Substrate to comply with current Viking Roofspec Masterspec specification
 Substrate Checksheet available from www.vikingroofspec.co.nz

DRAWING TITLE

Viking Enviroclad
Internal Gutter_to Wall

NOTES:

- * Angle fillets are not required at upstands for Enviroclad
- * All fixings, cladding and structure are indicative only unless notated

CodeMark

Cert # GM-CMNZ30058
 Cert # BV-CMNZ70176
 Enviroclad systems are CodeMarked

DRAWING

INFORMATION ONLY

Scale:	Date:	Drawn:	Viking
Not to Scale	23/11/2020		
Detail Ref:			VIK_ENV_051_GUTTWALL

