


NOTE:

Substrate to comply with current Viking
Roofspec Masterspec specification
Substrate Checksheet available from
www.vikingroofspec.co.nz

Viking Enviroclad TPO
waterproofing membrane 1.52 mm
thick, install as per manufacturers
instructions

Viking PIR Polyiso Insulation

Substrate

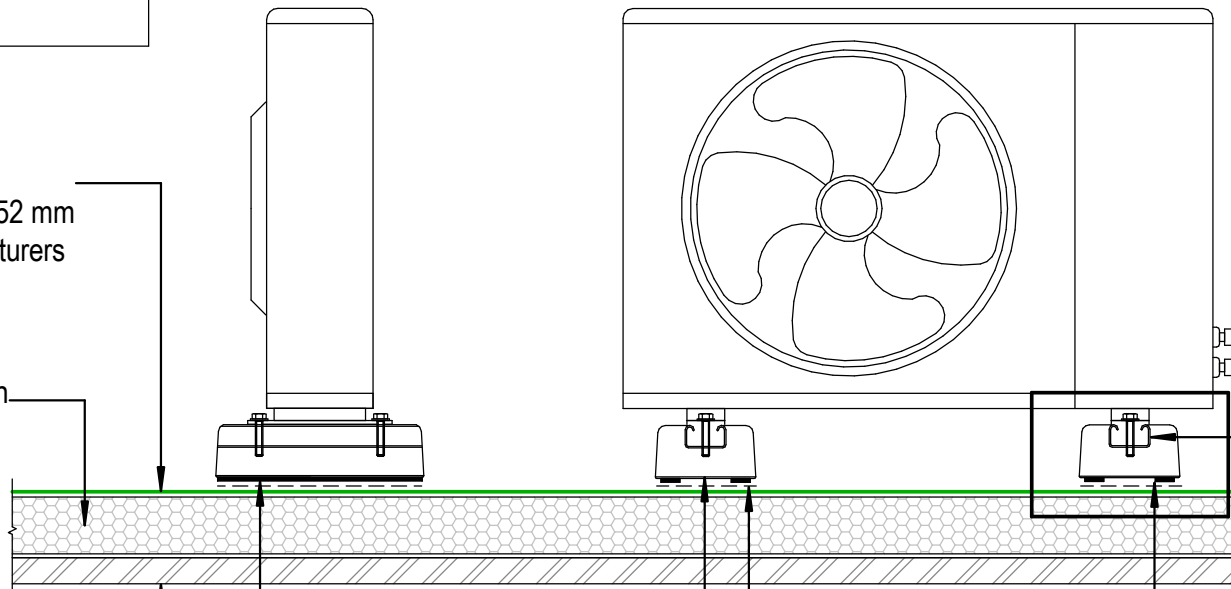

Acoustic Mounting Block
ACM250 or ACM400
250mm / 400mm

No Fastenings to penetrate membrane block
to be mounted with SEC034 Lap Seam
Primer and SMT076V Lap Tape

Secure sealed fixing into the
Strut Channel insert without
penetrating Viking
Waterproofing Membrane

DRAWING TITLE

Viking WarmSpan - Enviroclad
Penetration_Acoustic Mounting Block

NOTES:

- * Angle fillets are not required at upstands for Enviroclad
- * All fixings, cladding and structure are indicative only unless notated
- * All details to be read in conjunction with Viking Specifications

WarmSpan System is Branz
Appraised - 713

DRAWING

INFORMATION ONLY

Scale:	Date:	Drawn:	Viking
Not to Scale	01/03/2022		
Detail Ref:			VIK_WSE_014_PENEACOU