
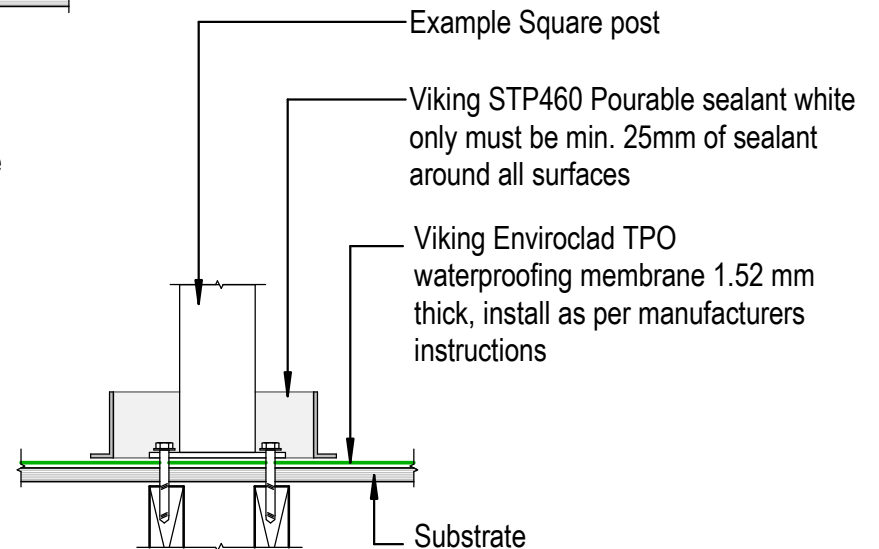
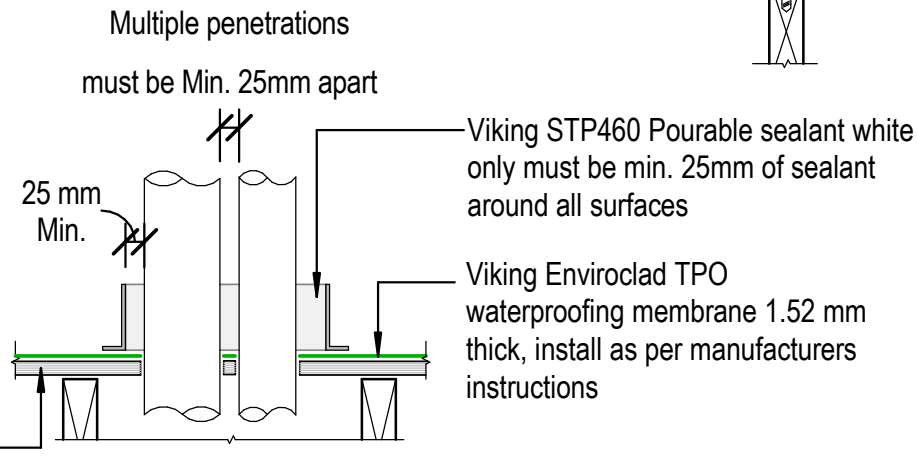


NOTE:
 A Solution for very difficult shaped penetrations.
Note That all surfaces in contact with Pourable sealant must be primed with Viking SEC034 Lap primer
 This includes all pipes, bolts, brackets and TPO sealant surround.
 For specific requirements contact Viking Roofspec for advice

NOTE:
 STP460 Pourable Pocket Sealant can be installed to materials reaching maximum 90°C

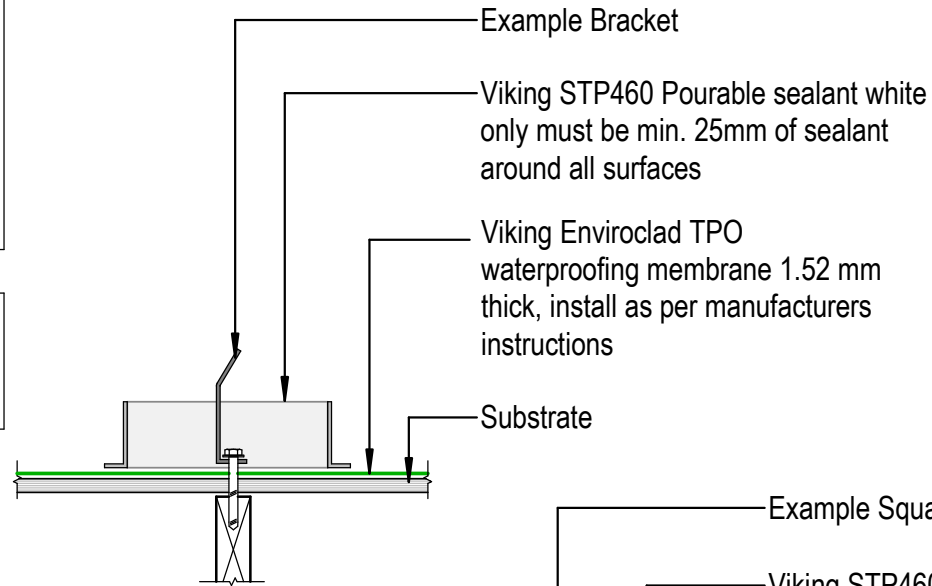

NOTE:
 Substrate to comply with current Viking Roofspec Masterspec specification
 Substrate Checksheet available from www.vikingroofspec.co.nz

DRAWING TITLE

Viking Enviroclad
 Penetration_TPO Pourable pocket and sealant

NOTES:

* Angle fillets are not required at upstands for Enviroclad
 * All fixings, cladding and structure are indicative only unless notated

CodeMark

Cert # GM-CMNZ30058
 Cert # BV-CMNZ70176
 Enviroclad systems are CodeMarked

DRAWING

INFORMATION ONLY

| | | | |
|--------------|------------|--------|--------|
| Scale: | Date: | Drawn: | Viking |
| Not to Scale | 23/11/2020 | | |

Detail Ref: **VIK_ENV_010_PENETPO**

