


Dektite Aluminium Over Flashing suitable for 115° Ref Dektite for specific flashing

Viking Enviroclad TPO waterproofing membrane 1.52 mm thick, install as per manufacturers instructions

Substrate

NOTE:
Substrate to comply with current Viking Roofspec Masterspec specification
Substrate Checksheet available from www.vikingroofspec.co.nz

NOTE:
Enviroclad Membrane can be installed to flue outer-liners reaching maximum 70°C

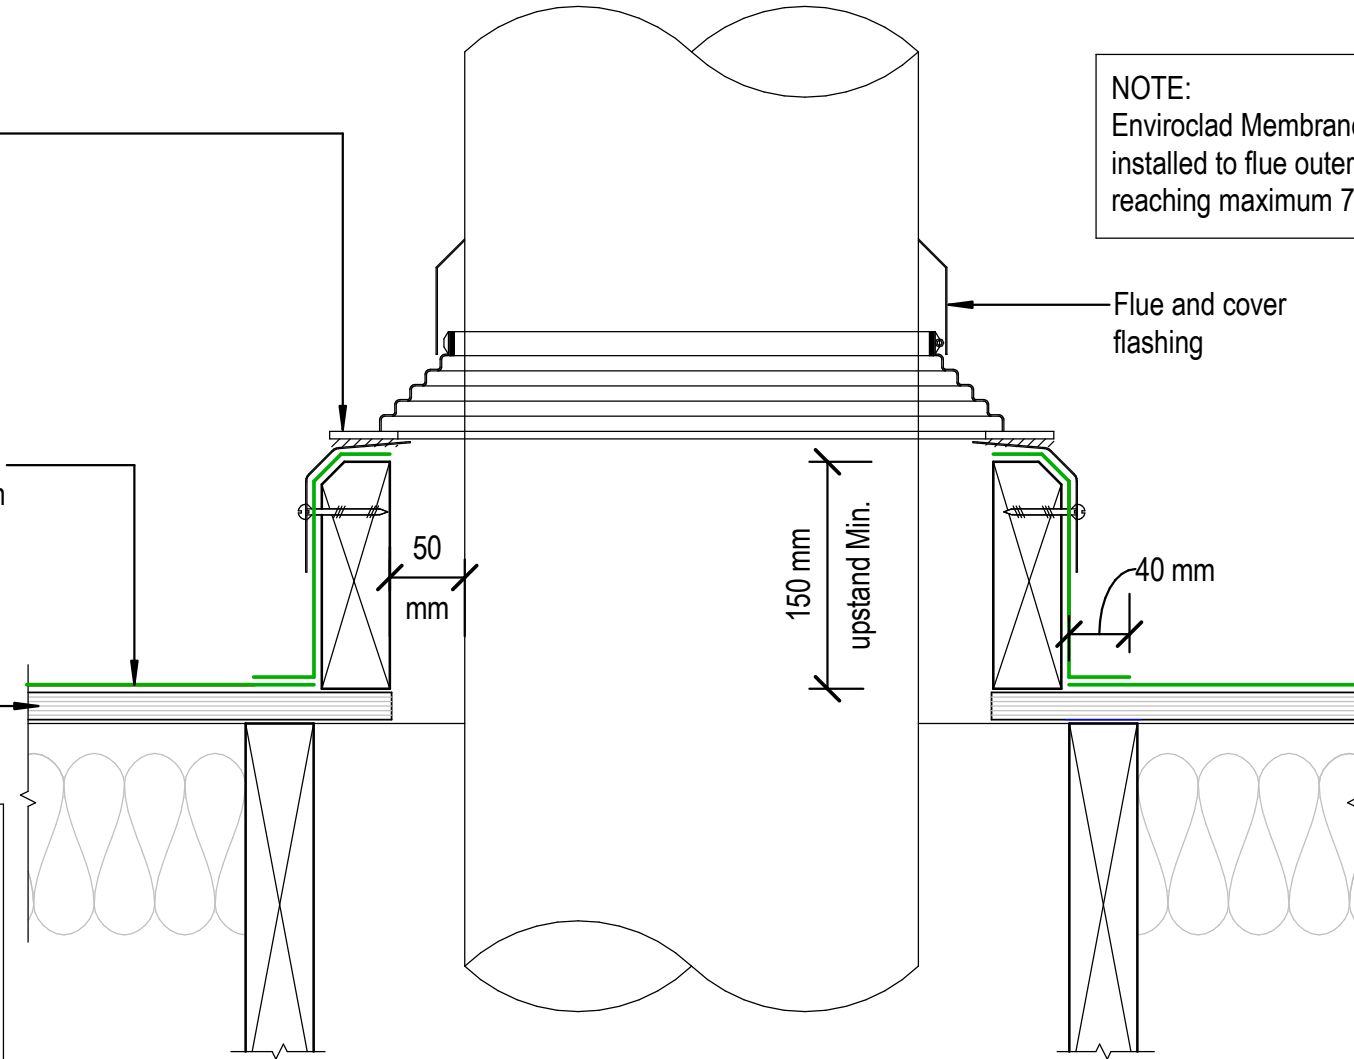

DRAWING TITLE

Viking Enviroclad
Penetration_Flue or Oversize Pipe

NOTES:

- * Angle fillets are not required at upstands for Enviroclad
- * All fixings, cladding and structure are indicative only unless notated

CodeMark

Cert # GM-CMNZ30058

Cert # BV-CMNZ70176

Enviroclad systems are CodeMarked

DRAWING

INFORMATION ONLY

Scale:

Not to Scale

Date:

23/11/2020

Drawn:

Viking

Detail Ref:

VIK_ENV_007_PENEFLUE

Viking Roofspec
Taking care of detail