


Substrate with Viking Primer

Backing Rod Sealant

Viking Peel & Stick Tanking membrane installed per manufacturers instructions

Viking Peel & Stick Tanking membrane under-flashed 300mm wide min.

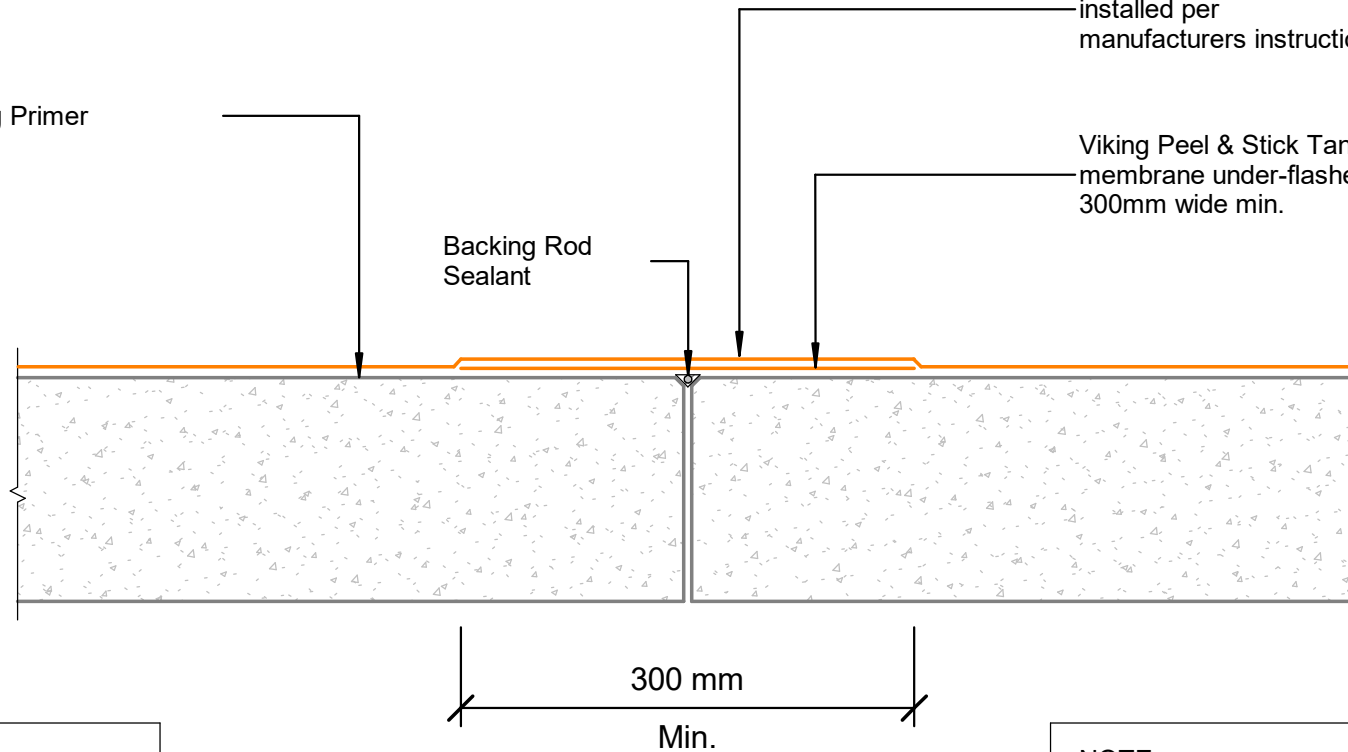

NOTE:
To allow for movement of the substrate for the 300mm wide Peel & Stick Tanking under-flashing adhere only one side of the membrane

NOTE:
Substrate to comply with current Viking Roofspec Masterspec specification
Substrate Checksheet available from www.vikingroofspec.co.nz

DRAWING TITLE

Viking Tanking - Peel & Stick Intersection_Control Joint

NOTES:

* All fixings, cladding and structure are indicative only unless notated
* Drawings to be read with Viking Specifications

INFORMATION

Viking Tanking systems are BRANZ Appraised - 826

DRAWING

INFORMATION ONLY

Scale:	Date:	Drawn:	Viking
Not to Scale	01/03/2022		
Detail Ref:			VIK_BGT_PS_13