


Viking Enviroclad TPO waterproofing membrane 1.52 mm thick, install as per manufacturers instructions

Viking 80mmØ side exit clamped drain SDM055 with 304 S/S domed grate, installed as per manufacturers instructions.

Viking 80mmØ side exit clamped overflow drain SDM055 with 304 S/S domed grate, installed as per manufacturers instructions.

Substrate

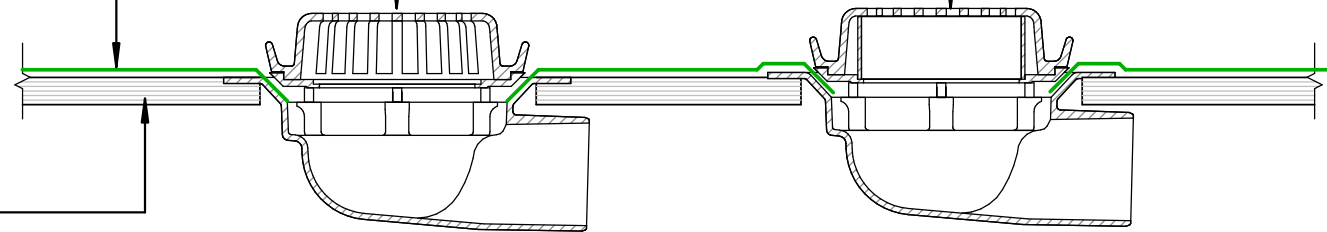

230 mm Flange width

230 mm Flange width

NOTE:  
 Substrate to comply with current Viking Roofspec Masterspec specification  
 Substrate Checksheet available from [www.vikingroofspec.co.nz](http://www.vikingroofspec.co.nz)

NOTE:  
 1/ Overflow to match outlet capacity.  
 2/ Overflow to be plumbed independent of stormwater, through soffit or exterior wall

DRAWING TITLE

Viking Enviroclad  
 Penetration\_Outlet and Overflow Side Exit

NOTES:

\* Angle fillets are not required at upstands for Enviroclad  
 \* All fixings, cladding and structure are indicative only unless notated

**CodeMark**

Cert # GM-CMNZ30058

Cert # BV-CMNZ70176

Enviroclad systems are CodeMarked

DRAWING

INFORMATION ONLY

Scale:	Date:	Drawn:	Viking
Not to Scale	23/11/2020		

Detail Ref: **VIK\_ENV\_001A\_PENEOUTL**

**Viking** Roofspec  
 Taking care of detail