

Viking WarmSpan¹

(Any queries regarding compliance of the Viking WarmSpan¹ system can be answered in its corresponding Holmes Solutions Engineering report. Contact your Territory Manager or ph 0800 729 799 for more info)







VWR050

Kingspan TR27 Polyiso Sheets – Glass-Facer




Product Code	Description	Thickness	Size**	Long Term* R- Value	Stocked In
VWR025B	Polyiso	25mm	1.20m x 2.27m	0.95	AK, ChC
VWR050	Polyiso	50mm	1.20m x 2.27m	1.85	AK, ChC
VWR075	Polyiso	75mm	1.20m x 2.27m	2.75	AK, ChC
VWR100	Polyiso	100mm	1.20m x 2.27m	4.00	AK, ChC

1. *Average R-Value over 15 year period
2. **Sheet lengths may vary. Check with Customer Services first
3. Must be adhered to the substrate with Flexible F.A.S.T. Adhesive (WarmSpan¹ is not a mechanically fastened system) but it can be used with or without coverboard (adhered with a Viking polyurethane foam adhesive)
4. **NB:** Only Kingspan PIR applies to WarmSpan¹

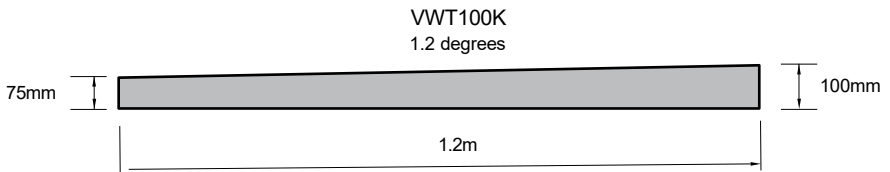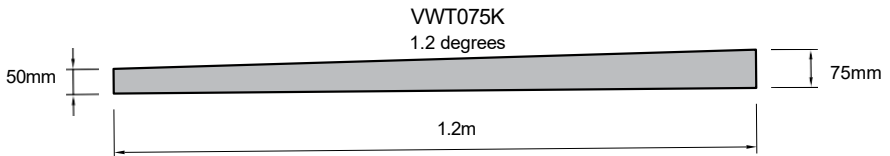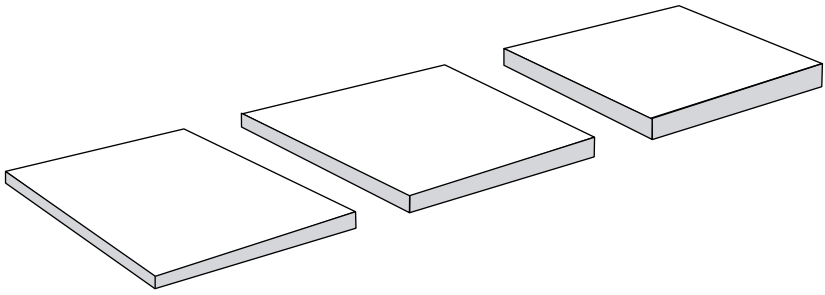

Kingspan TT47 1.2 degrees Taper Polyiso Sheets – Glass-Facer

Product Code	Description	Thickness	Slope	Size	Long Term R – Value*	Stocked In
VWT050K	Tapered Polyiso	50mm – 25mm	1.2°	1.2m x 1.2m	R 1.38	AK
VWT075K	Tapered Polyiso	75mm – 50mm	1.2°	1.2m x 1.2m	R 2.30	AK
VWT100K	Tapered Polyiso	100mm – 75mm	1.2°	1.2m x 1.2m	R 3.38	AK

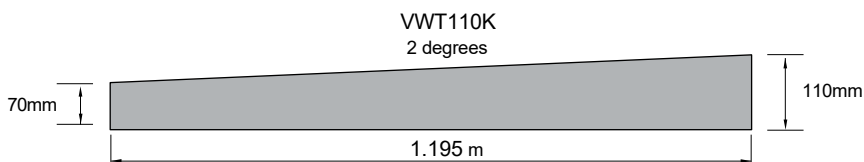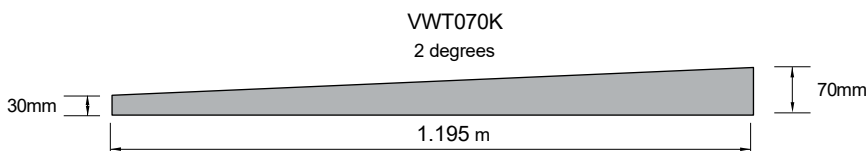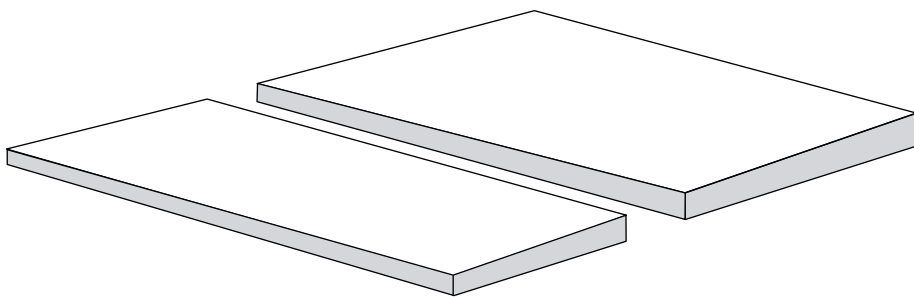

Kingspan TT47 2 degrees Tapered Polyiso Sheets – Glass-Facer

Product Code	Description	Thickness	Slope	Size	Long Term R – Value	Stocked In
VWT070K	Tapered Polyiso	70mm – 30mm	2°	1.195 x 2.285m	R 2.19	AK
VWT110K	Tapered Polyiso	110mm – 70mm	2°	1.195 x 2.285m	R 4.01	AK




VWR725A



SES301

Vapour Barrier and Primer						
Product Code	Description	Size	Est. Coverage**	Weight	M ³	Stocked In
SES301	Vapour Barrier Primer Solvent Based*	19L	80m ² /pail**	20kg	0.03	AK, ChC
VWR725A	Vapour Barrier*	1.0m x 30.4m		28kg	0.07	
Refer Viking Product Data Sheet Vapour Barrier VWR725A for installation guidance						

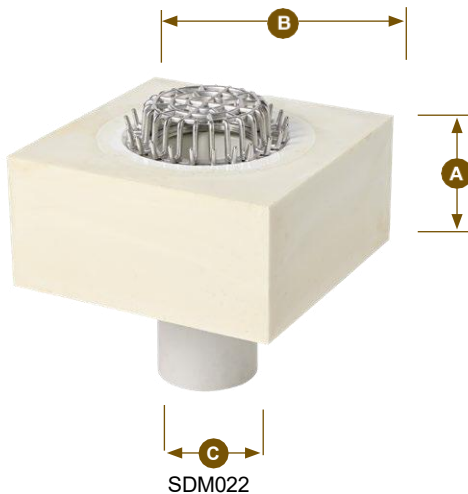

Insulated Drains

Product Code	A	B	C	Stocked In
SDM022	Made to order	300mm	100mm	AK
SDM023	Made to order	300mm	80mm	

Made to order - 3 week leadtime

[back to contents](#)



STP900B



STP912



STP901a / STP901b

Caulking Gun, Accessories and F.A.S.T. Adhesive

Product Code	Description	Stocked In
STP900B	Flexible F.A.S.T Adhesive Dual Cartridge (1.5litre/set (750ml A+B) (Average 7 – 10m ² / set)	AK, WN, ChC
STP911	Dual Cartridge Manual Caulking Gun (Long)	
STP912	Dual Cartridge Manual Caulking Gun (Short)	
STP901a	Flexible F.A.S.T Adhesive Dual Tank Part A (18.9 litres) Coverage approx. 300 – 320m ² / A+B set)	
STP901b	Flexible F.A.S.T Adhesive Dual Tank Part B (18.9 litres) Coverage approx. 300 – 320m ² / A+B set)	
To be used with Enviroclad F.B.S., Epiclad F.B.S. and Kingspan polyiso insulation panels for WarmSpan ¹ specifications		



VWS140



VWS150B

Viking WarmSpan¹

Product Code	Description	Size	Stocked In
	Steel Deck Roof tray Options (available direct from your preferred steel tray provider): Metalcraft -Metcom 7, Steel & Tube ST7, ST900 Dimond – Brownbuilt 900 Roofing Industries - Multi-rib		Supplied by others
VWS140*	Viking Vapour Barrier Tape. SEALED DECK	(3M) 152mm x 22.9m	AK
VWS150B*	Industrial Silicone 600ml Sausage, Sheet Vapour Seal. SEALED DECK	300ml	

Tape and silicone vapour barrier system can be used as an alternative to a full self adhered vapour sheet (for WarmSpan¹ only) for projects without mechanical fasteners. All mechanically fastened projects require full self adhered vapour barrier