


Viking Torch-on CAP sheet 4mm thick, install as per manufacturers instructions

Viking Torch-on BASE sheet 3mm thick, install as per manufacturers instructions

Substrate

Viking 80mmØ clamped drain SDM049 with 304 S/S domed grate, installed as per manufacturers instructions.

Viking 80mmØ clamped overflow drain SDM049 with 304 S/S domed grate, installed as per manufacturers instructions.

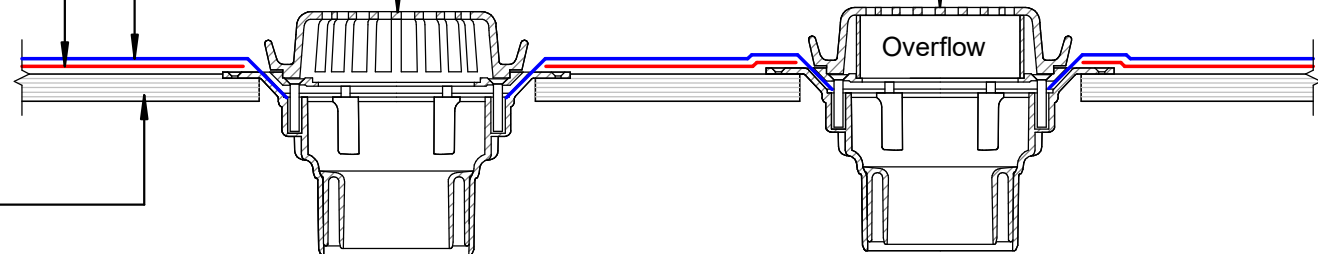

Flange width 230mm  
(280mm for 150mm outlet)

**NOTE:**  
Substrate to comply with current Viking Roofspec Masterspec specification  
Substrate Checksheet available from [www.vikingroofspec.co.nz](http://www.vikingroofspec.co.nz)

**NOTE:**  
1/ Overflow to match outlet capacity.  
2/ Overflow to be plumbed independent of stormwater, through soffit or exterior wall  
3/ Viking Solvent-based Bituminous Primer to all metal and proprietary fitting

DRAWING TITLE

Viking Torch-On  
Penetration\_Outlet and Overflow

NOTES:

- Viking Waterproof Membrane as notated can be Viking Gemini, Lybra or Phoenix Super.
- All fixings, cladding and structure are indicative only unless notated.



Viking Torch-On systems are CodeMarked

DRAWING

INFORMATION ONLY

|              |            |        |        |
|--------------|------------|--------|--------|
| Scale:       | Date:      | Drawn: | Viking |
| Not to Scale | 23/11/2020 |        |        |

Detail Ref: **VIK\_TOR\_001\_PENEOUTL**