


NOTE:

Substrate to comply with current Viking
Roofspec Masterspec specification
Substrate Checksheet available from
www.vikingroofspec.co.nz

Viking Enviroclad TPO
waterproofing membrane 1.52 mm
thick, install as per manufacturers
instructions

Substrate

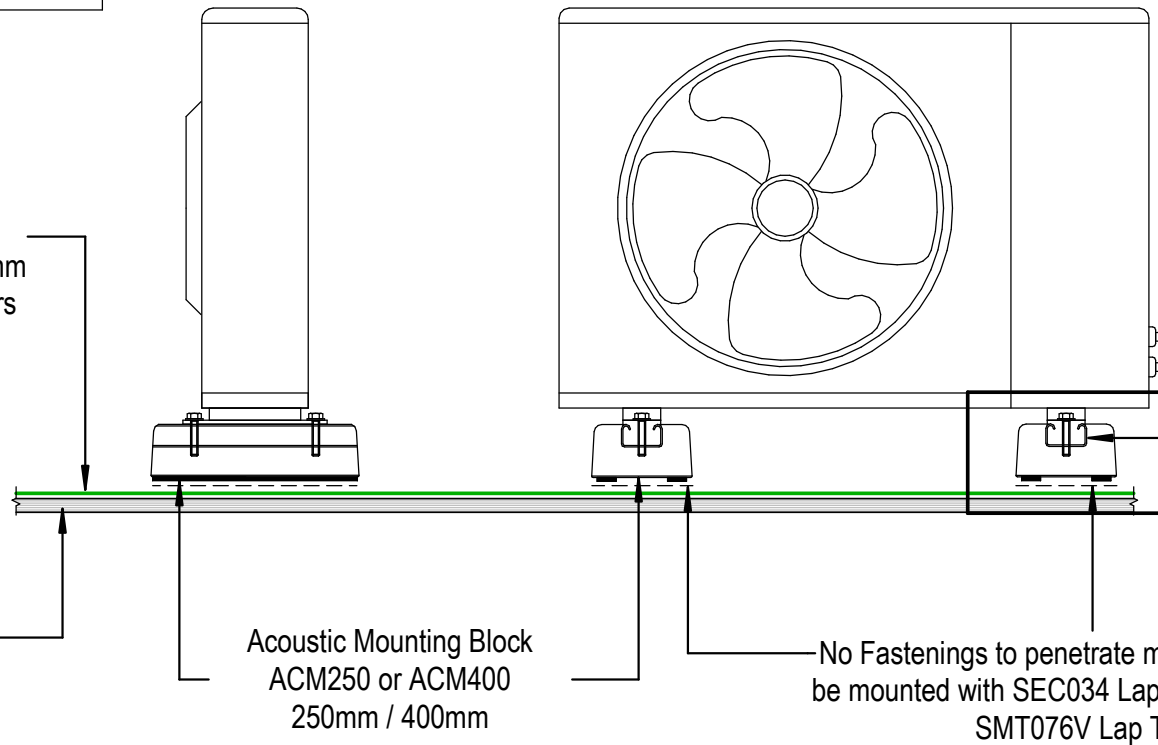

Secure sealed fixing into
the Strut Channel insert
without penetrating Viking
Waterproofing Membrane

No Fastenings to penetrate membrane block to
be mounted with SEC034 Lap Seam Primer and
SMT076V Lap Tape

DRAWING TITLE

Viking Enviroclad
Penetration_Acoustic Mounting Block

NOTES:

- * Angle fillets are not required at upstands for Enviroclad
- * All fixings, cladding and structure are indicative only unless notated

CodeMark

Cert # GM-CMNZ30058
Cert # BV-CMNZ70176
Enviroclad systems are CodeMarked

DRAWING

INFORMATION ONLY

Scale:	Date:	Drawn:	Viking
Not to Scale	23/11/2020		

Detail Ref: **VIK_ENV_014_PENEACOU**

Viking Roofspec
Taking care of detail